




Swegon INSIDE

Koble WISE-systemer til Swegon INSIDE Cloud for å utnytte
våre tilkoblede skytjenester

Sørg for at du har SW 1.150.1 eller nyere
(anbefalt minimumsversjon: 2.10)

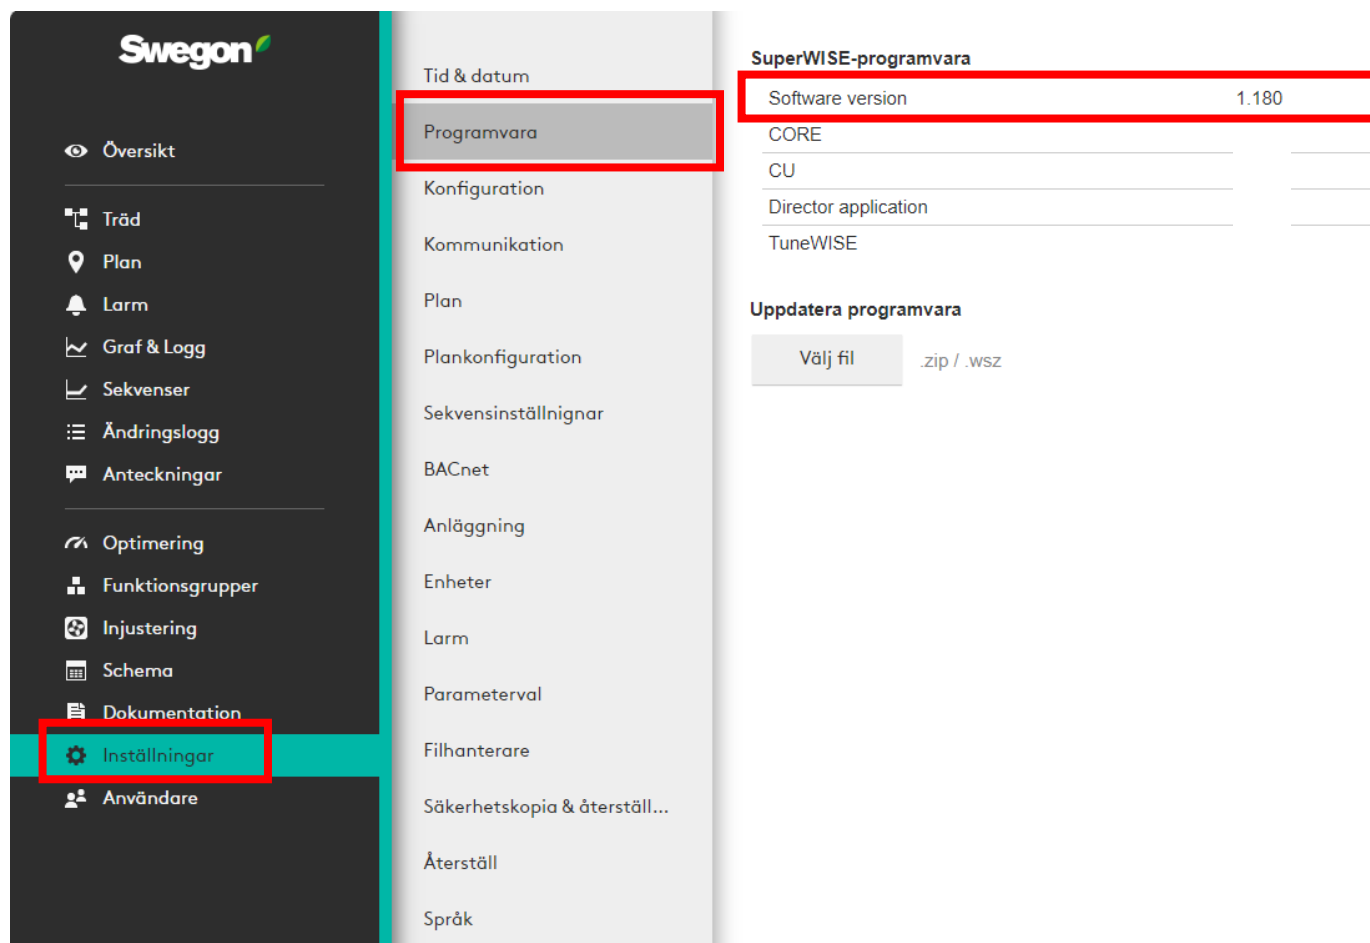


The screenshot displays the Swegon software interface. On the left, a dark sidebar contains a menu with icons and labels. The 'Inställningar' (Settings) option, marked with a gear icon, is highlighted with a red rectangle. The main content area is divided into two columns. The left column lists various system settings such as 'Tid & datum', 'Programvara', 'Konfiguration', 'Kommunikation', 'Plan', 'Plankonfiguration', 'Sekvensinställningar', 'BACnet', 'Anläggning', 'Enheter', 'Larm', 'Parameterval', 'Filhanterare', 'Säkerhetskopiering & återställning', 'Återställ', and 'Språk'. The 'Programvara' option is highlighted with a red rectangle. The right column displays the 'SuperWISE-programvara' section, which includes a table with the following data:

SuperWISE-programvara	
Software version	1.180
CORE	
CU	
Director application	
TuneWISE	

Below this table, there is a section titled 'Uppdatera programvara' (Update software) with a button labeled 'Välj fil' (Select file) and a file type indicator '.zip / .wsz'.

Aktiver Swegon INSIDE på produktet

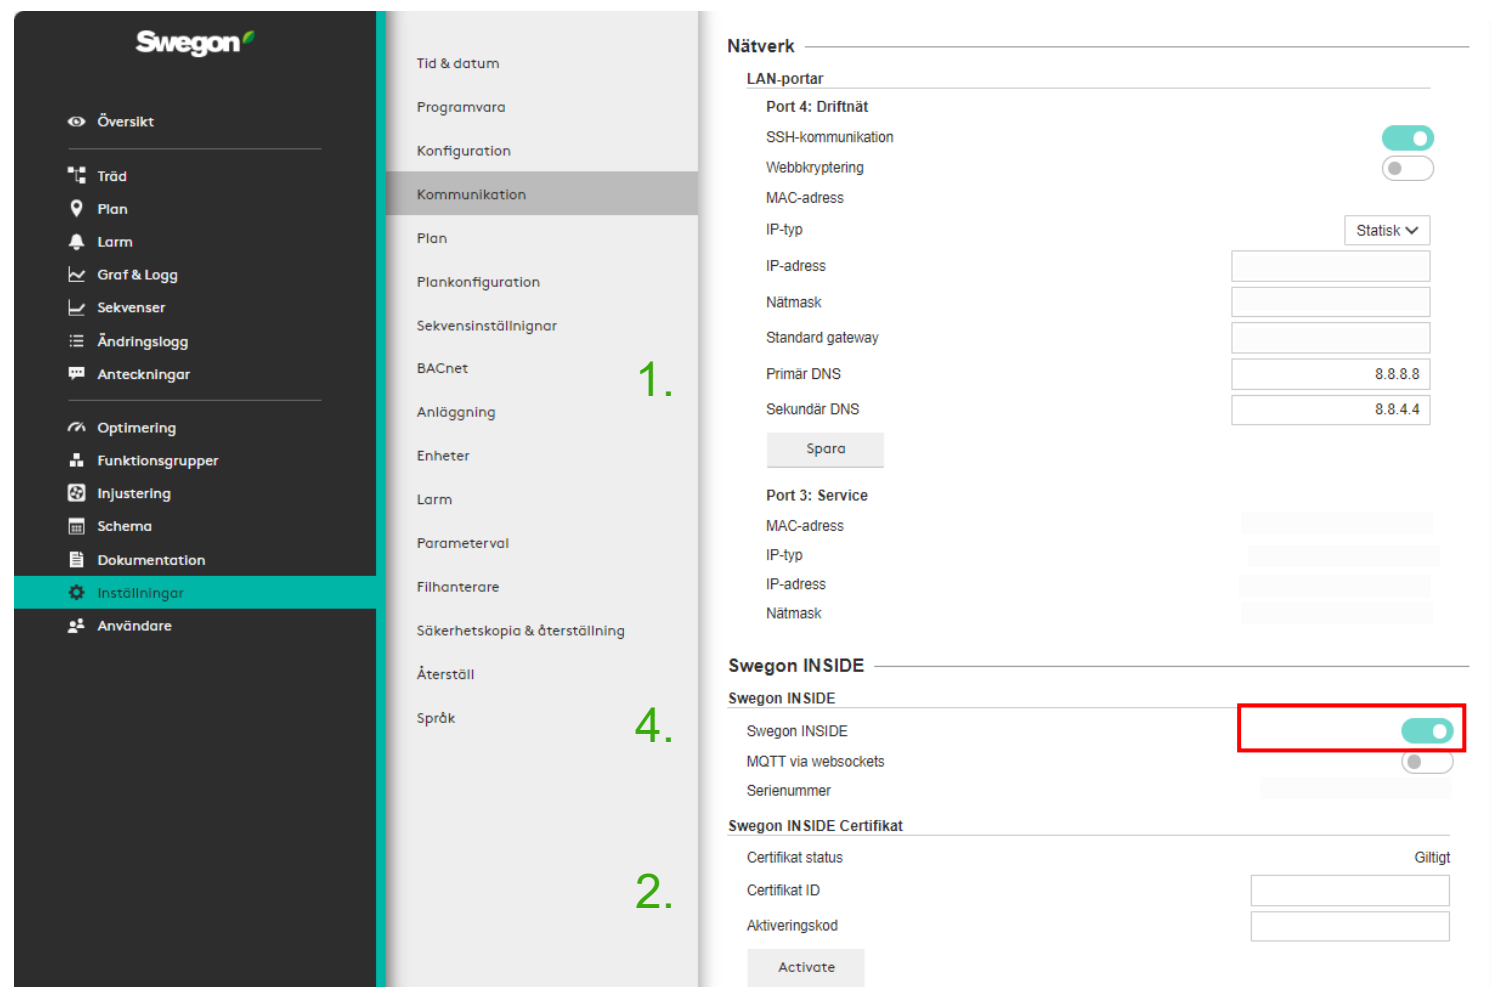

The screenshot shows the Swegon web interface with a dark sidebar on the left and a main content area on the right. The sidebar contains a menu with various options, including 'Inställningar' (Settings) which is highlighted in teal. The main content area is divided into sections for 'Nätverk' (Network) and 'Swegon INSIDE'.

1. In the 'Nätverk' section, the 'Port 4: Driftnät' (Operational Network) settings are visible. The 'SSH-kommunikation' (SSH communication) toggle is turned on. Below this, there are fields for 'IP-adress' (IP address), 'Nätmask' (Subnet mask), and 'Standard gateway'. The 'Primär DNS' (Primary DNS) is set to 8.8.8.8 and the 'Sekundär DNS' (Secondary DNS) is set to 8.8.4.4. A 'Spara' (Save) button is located below these fields.

2. In the 'Swegon INSIDE' section, the 'Swegon INSIDE' toggle is turned on and is highlighted with a red rectangle. Below this, there are fields for 'MQTT via websockets' and 'Serienummer' (Serial number).

3. In the 'Swegon INSIDE Certifikat' (Swegon INSIDE Certificate) section, there are fields for 'Certifikat status' (Certificate status), 'Certifikat ID' (Certificate ID), and 'Aktiveringskod' (Activation code). An 'Activate' button is located at the bottom of this section.

4. The 'Inställningar' (Settings) option in the sidebar is highlighted in teal.

Opprett en konto

- Gå til [Swegons nettsted](#)
 - Support og programvare → Tilkoblede produkter
- 1 Be om tilgang til INSIDE Portal
- 2 Fyll ut skjemaet og klikk på "Send"
- Vent deretter på e-posten som inviterer deg til INSIDE Portal

Kom igång!

1

1. Begär åtkomst till INSIDE Portal

2. Lägg till produkter i INSIDE Portal/Gör din produkt INSIDE Ready (endast för retrofit)

3. Gå till INSIDE Portal

Kom igång!

1. Begär tillgång till INSIDE Portal

Ange uppgifterna nedan för att begära ett konto.

Om du redan har ett konto och vill lägga till en ny produkt eller byggnad, kontakta digitalservices@swegon.com

Kontoinformation

Email (används som användarnamn)*

Förnamn*

Efternamn*

Företag*

Byggnads- och produktinformation

Välj produkt*

Produktens serienummer*

Byggnadens namn*

Byggnadens adress*

Ort*

Land*

Din integritet är viktig för oss. Swegon använder dina uppgifter till att förse dig med information om den begärda tjänsten. Du kan avregistrera dig från denna kommunikation när som helst. För mer information, se vår integritetspolicy.

skyddas av reCAPTCHA
Integritet - Villkor


SKICKA

2

1. Logg inn på INSIDE Portal

Swegon INSIDE Portal

- <https://inside.swegon.com>

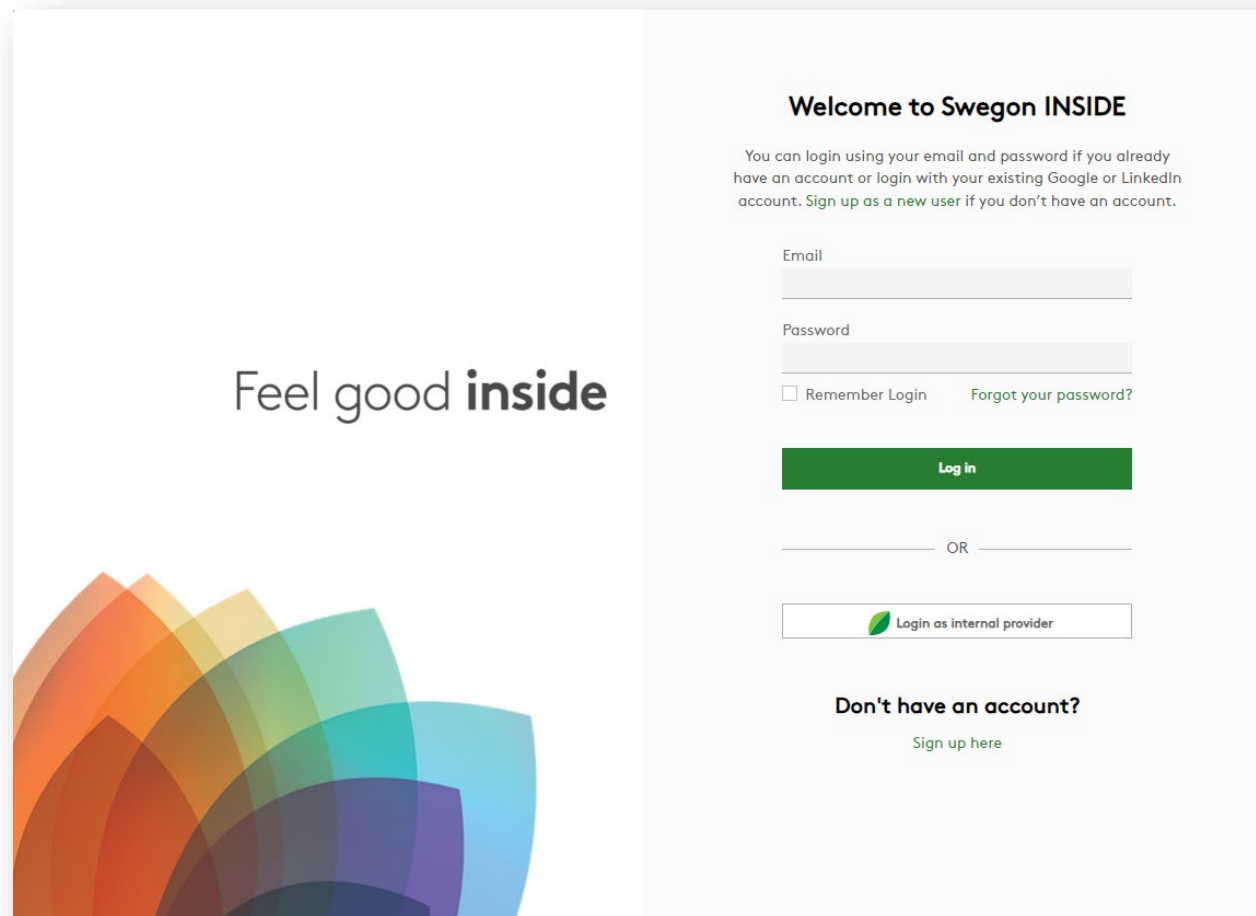

The image shows the login page for the Swegon INSIDE Portal. On the left, there is a large graphic with the text "Feel good **inside**" and a colorful, overlapping semi-circular pattern in shades of orange, yellow, green, and blue. On the right, the page is titled "Welcome to Swegon INSIDE". Below the title, there is a paragraph explaining login options: "You can login using your email and password if you already have an account or login with your existing Google or LinkedIn account. Sign up as a new user if you don't have an account." The login form includes fields for "Email" and "Password", a checkbox for "Remember Login", and a link for "Forgot your password?". A green "Log in" button is positioned below these fields. Below the button, there is a horizontal line with "OR" in the center. Underneath, there is a button with a green leaf icon and the text "Login as internal provider". At the bottom, there is a section titled "Don't have an account?" with a link "Sign up here".

Welcome to Swegon INSIDE

You can login using your email and password if you already have an account or login with your existing Google or LinkedIn account. Sign up as a new user if you don't have an account.

Email

Password

☐ Remember Login [Forgot your password?](#)

Log in

OR

 Login as internal provider

Don't have an account?

[Sign up here](#)

2. Gå til bygningssiden

Home > Organisations > Company Name

GO BACK

EDIT ORGANISATION

Company Name

Buildings

Search for building name

Name	City	Country	Number of products	Role
Head Office	Stockholm	Sweden	0	Organisation Admin

Rows per page: 100 1-1 of 1

Organisation administrators

App users

3. Trykk på “Claim product”

Home > Buildings > Head Office

GO BACK

Head Office
Organisation: Company Name

Products

CLAIM PRODUCT

Name ↑	Product type	Building	Serial number	Software version	Active alarm	INSIDE Cloud	INSIDE Connect
There are no products in the building							



Rows per page: 100 0-0 of 0

INSIDE Connect routers


Building administrators

Settings

4. Gi produktet et nytt navn og velg riktig produktfamilie og serienummer. Det riktige **serienummeret** er nødvendig for å koble til enheten og vise live data.

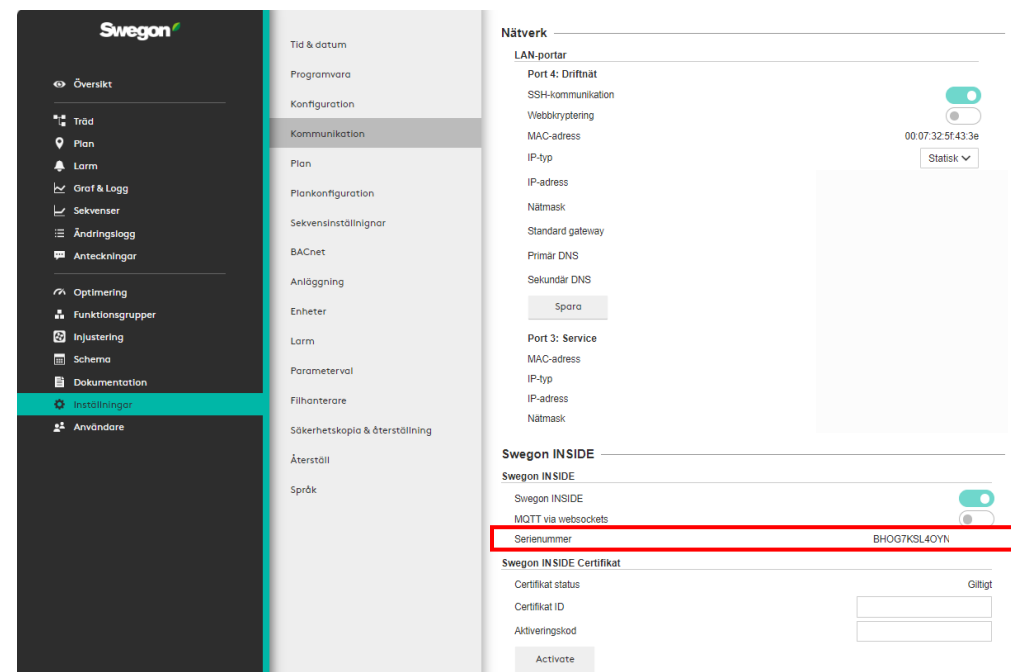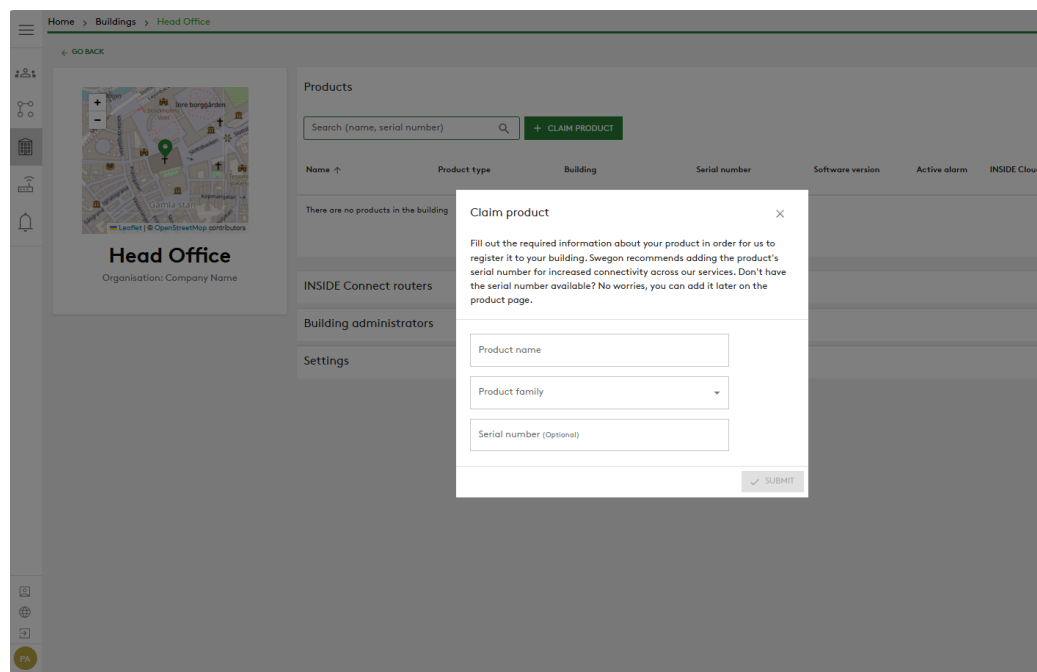

4b. Hvis produktet allerede er koblet til INSIDE Cloud, må du oppgi produktets MAC-adresse for å legge det til.

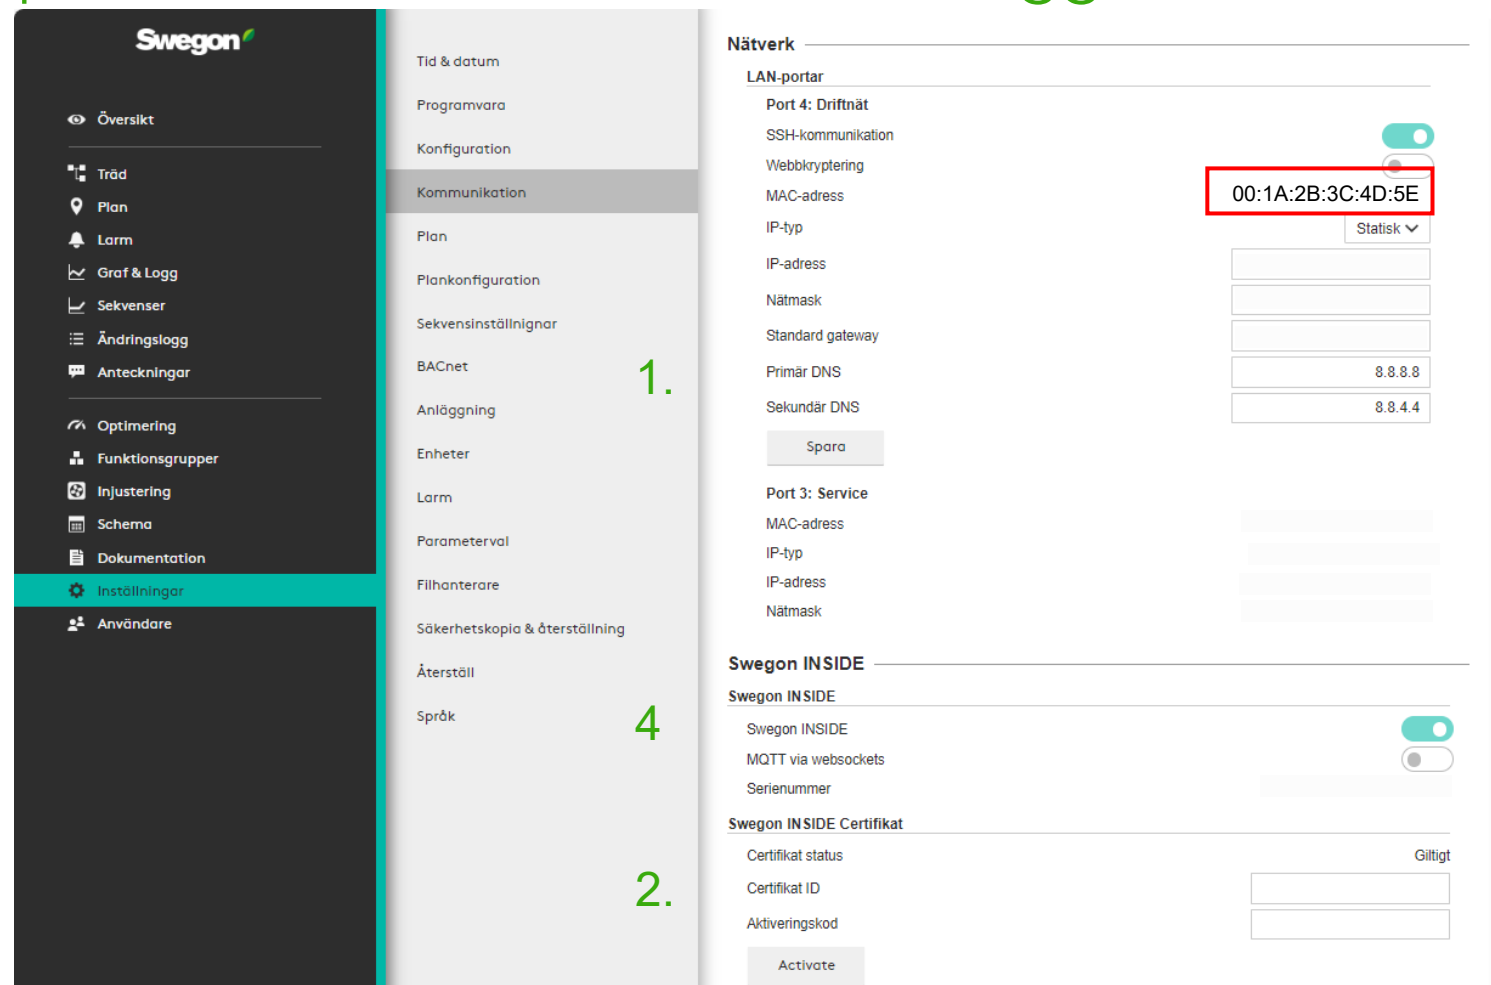

The screenshot shows the Swegon web interface. The left sidebar contains a menu with items like 'Översikt', 'Träd', 'Plan', 'Larm', 'Graf & Logg', 'Sekvenser', 'Ändringslogg', 'Anteckningar', 'Optimering', 'Funktionsgrupper', 'Injustering', 'Schema', 'Dokumentation', 'Inställningar', and 'Användare'. The 'Inställningar' item is highlighted. The main content area is divided into sections: 'Tid & datum', 'Programvara', 'Konfiguration', 'Kommunikation', 'Plan', 'Plankonfiguration', 'Sekvensinställningar', 'BACnet', 'Anläggning', 'Enheter', 'Larm', 'Parameter', 'Filhanterare', 'Säkerhetskopiering & återställning', 'Återställ', and 'Språk'. The 'Nätverk' (Network) section is active, showing 'LAN-portar' (LAN ports) and 'Swegon INSIDE' settings. The 'Port 4: Driftnät' (Operational network) section has a 'SSH-kommunikation' toggle turned on. The 'MAC-adress' field is highlighted with a red box and contains the value '00:1A:2B:3C:4D:5E'. Below this are fields for 'IP-typ', 'IP-adress', 'Nätmask', and 'Standard gateway'. The 'Primär DNS' is set to '8.8.8.8' and 'Sekundär DNS' is set to '8.8.4.4'. There is a 'Spara' (Save) button. Below this is the 'Port 3: Service' section with fields for 'MAC-adress', 'IP-typ', 'IP-adress', and 'Nätmask'. At the bottom is the 'Swegon INSIDE' section with a 'Swegon INSIDE' toggle turned on, 'MQTT via websockets' toggle turned off, and a 'Serienummer' (Serial number) field. Below that is the 'Swegon INSIDE Certifikat' (Swegon INSIDE Certificate) section with fields for 'Certifikat status', 'Certifikat ID', and 'Aktiveringskod', and an 'Activate' button.

Home > Buildings > Head Office

[← GO BACK](#)

Home > Buildings > Head Office
< GO BACK



Head Office

Organisation: Company Name

Products


+ CLAIM PRODUCT

Name ↑	Product type	Building	Serial number	Software version	Active alarm	INSIDE Cloud	INSIDE Connect
WISE	WISE II	Head Office			🔒		CONNECT 30 MIN ⌵

Rows per page: 100 ⌵ 1-1 of 1 < >

- INSIDE Connect routers ⌵
- Building administrators ⌵
- Active alarms ⌵
- Settings ⌵

6. Hvis produktet ikke er koblet til INSIDE Cloud (vist nedenfor med det røde skysymbolet), må du kontrollere at
- Swegon INSIDE er aktivert på produktet
 - det har et gyldig sertifikat (INSIDE Ready)
 - produktets serienummer er registrert i INSIDE Portal

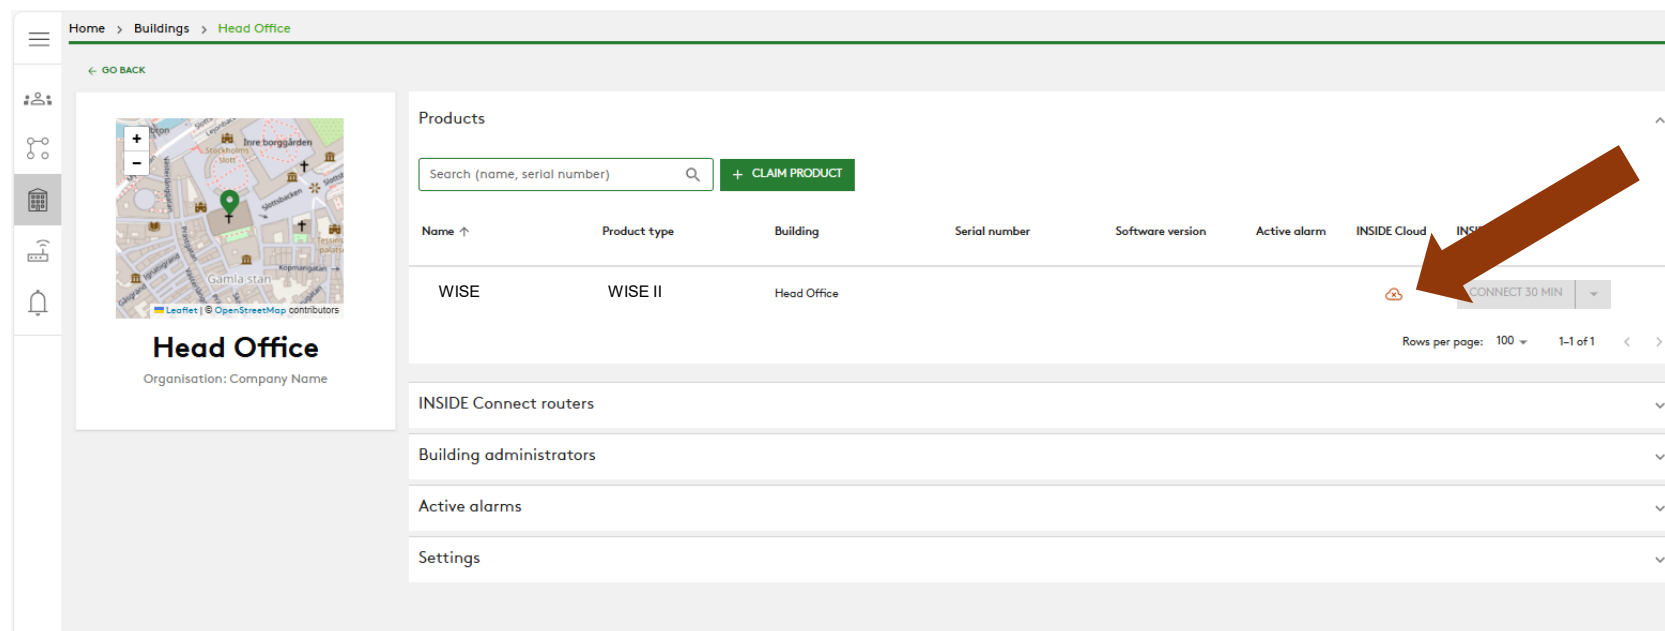

The screenshot shows the 'Head Office' page in the Swegon INSIDE Portal. On the left is a map of the area around Gamla stan. The main section is titled 'Products' and contains a table with one product listed: 'WISE' (Product type: WISE II, Building: Head Office). The 'INSIDE Cloud' column for this product shows a red cloud icon with a diagonal line through it, indicating it is not connected. A large red arrow points to this icon. To the right of the icon is a button that says 'CONNECT 30 MIN'. Below the table, there are links for 'INSIDE Connect routers', 'Building administrators', 'Active alarms', and 'Settings'. The bottom right corner shows 'Rows per page: 100' and '1-1 of 1'.

Name ↑	Product type	Building	Serial number	Software version	Active alarm	INSIDE Cloud	INSIDE Ready
WISE	WISE II	Head Office					

CONNECT 30 MIN

Rows per page: 100 1-1 of 1

INSIDE Connect routers

Building administrators

Active alarms


Settings



**Hvis produktet ditt ikke har et gyldig
sertifikat:**

Slik gjør du produktet ditt INSIDE Ready
(Retrofit)

1. Gå til bygningen din og klikk på produktet du vil gjøre INSIDE Ready.

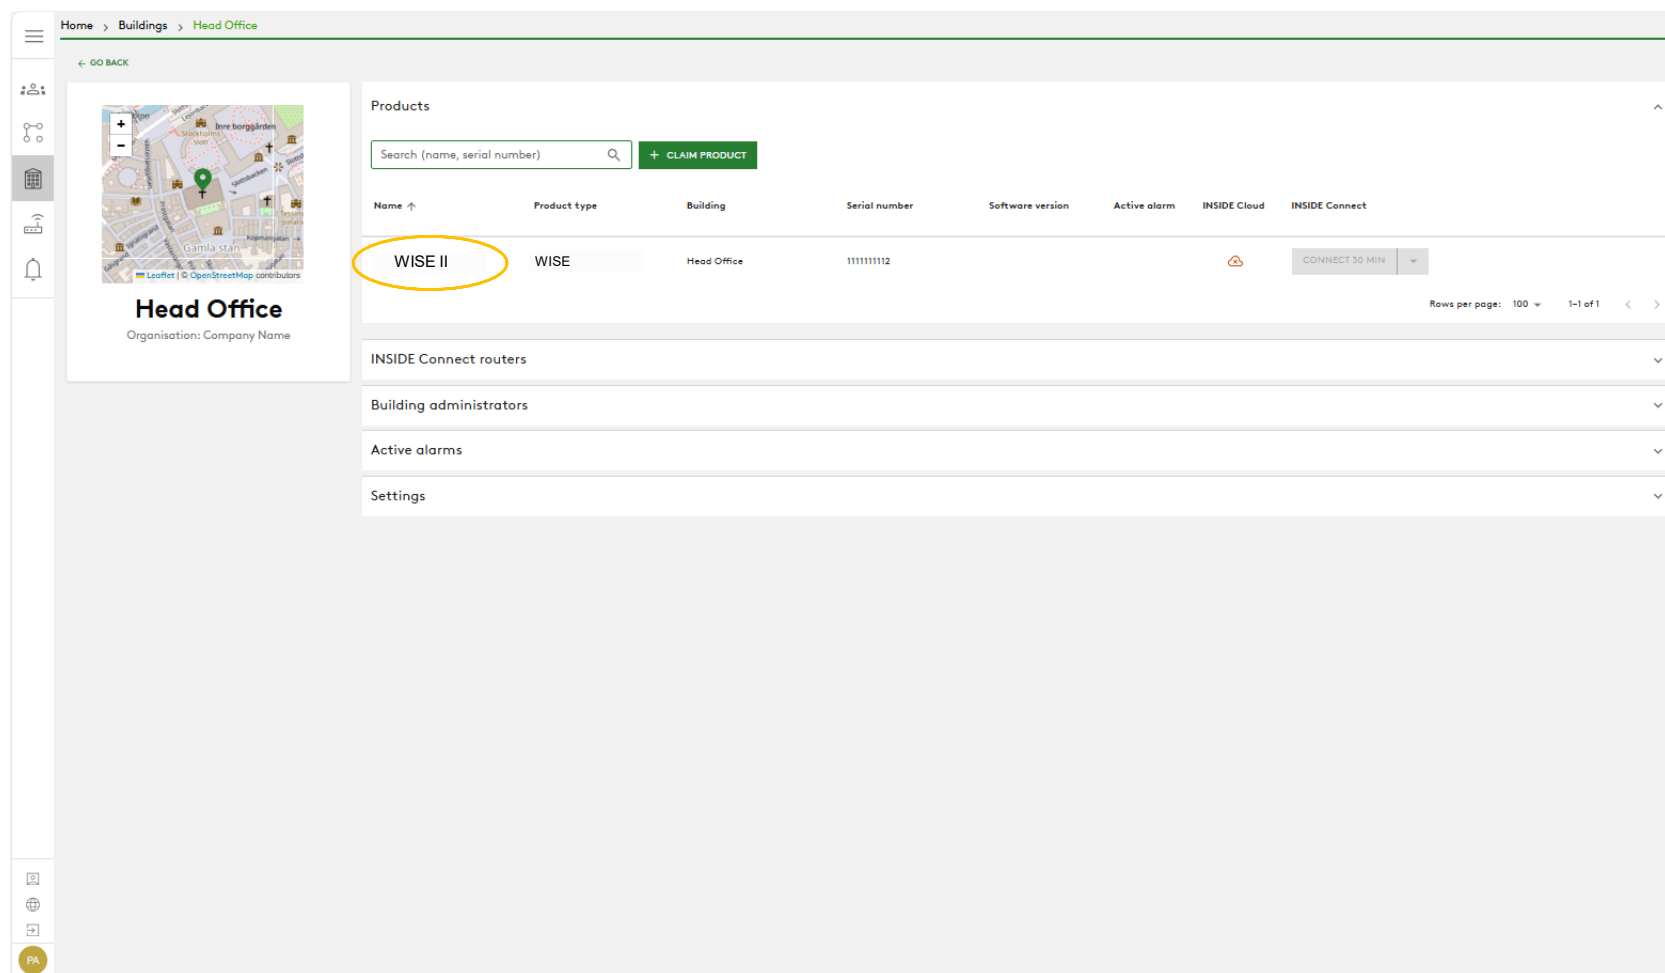

The screenshot shows the Swegon web interface. On the left, there is a sidebar with a map of 'Head Office' and a list of products. The main area displays a table of products. The 'WISE II' product is highlighted with a yellow circle. Below the table, there are sections for 'INSIDE Connect routers', 'Building administrators', 'Active alarms', and 'Settings'.

Name	Product type	Building	Serial number	Software version	Active alarm	INSIDE Cloud	INSIDE Connect
WISE II	WISE	Head Office	111111112				CONNECT 30 MIN

Rows per page: 100 1-1 of 1


INSIDE Connect routers

Building administrators

Active alarms

Settings

2. Trykk på knappen “MAKE INSIDE READY”.

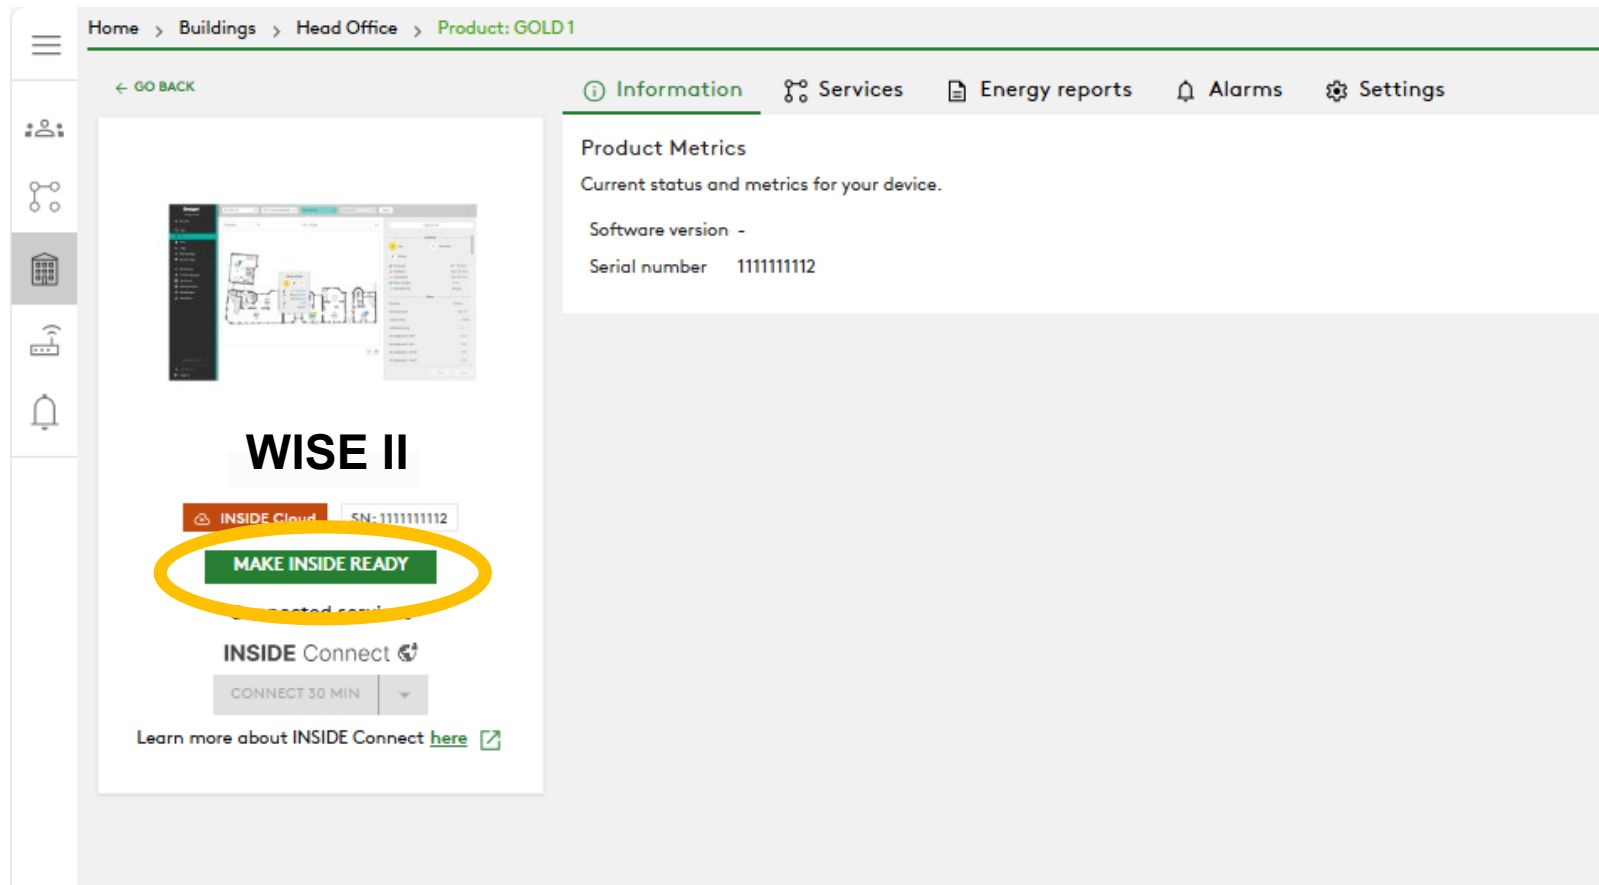

The screenshot displays the Swegon web interface for a device named 'WISE II'. The breadcrumb navigation at the top reads 'Home > Buildings > Head Office > Product: GOLD 1'. A secondary navigation bar includes links for 'Information', 'Services', 'Energy reports', 'Alarms', and 'Settings'. The left sidebar contains icons for users, network, buildings, and notifications. The main content area features a card for 'WISE II' with a thumbnail image of the device's interface. Below the title, it shows 'INSIDE Cloud' and 'SN-111111112'. A green button labeled 'MAKE INSIDE READY' is prominently displayed and circled in yellow. Below this button is a 'CONNECT 30 MIN' button and a link to 'Learn more about INSIDE Connect here'.

Home > Buildings > Head Office > Product: GOLD 1

← GO BACK

Information Services Energy reports Alarms Settings

Product Metrics

Current status and metrics for your device.

Software version -

Serial number 111111112

WISE II



INSIDE Cloud SN-111111112

MAKE INSIDE READY


CONNECT 30 MIN

Learn more about INSIDE Connect [here](#)


3. Skriv inn produktets MAC-adresse og trykk på Send.

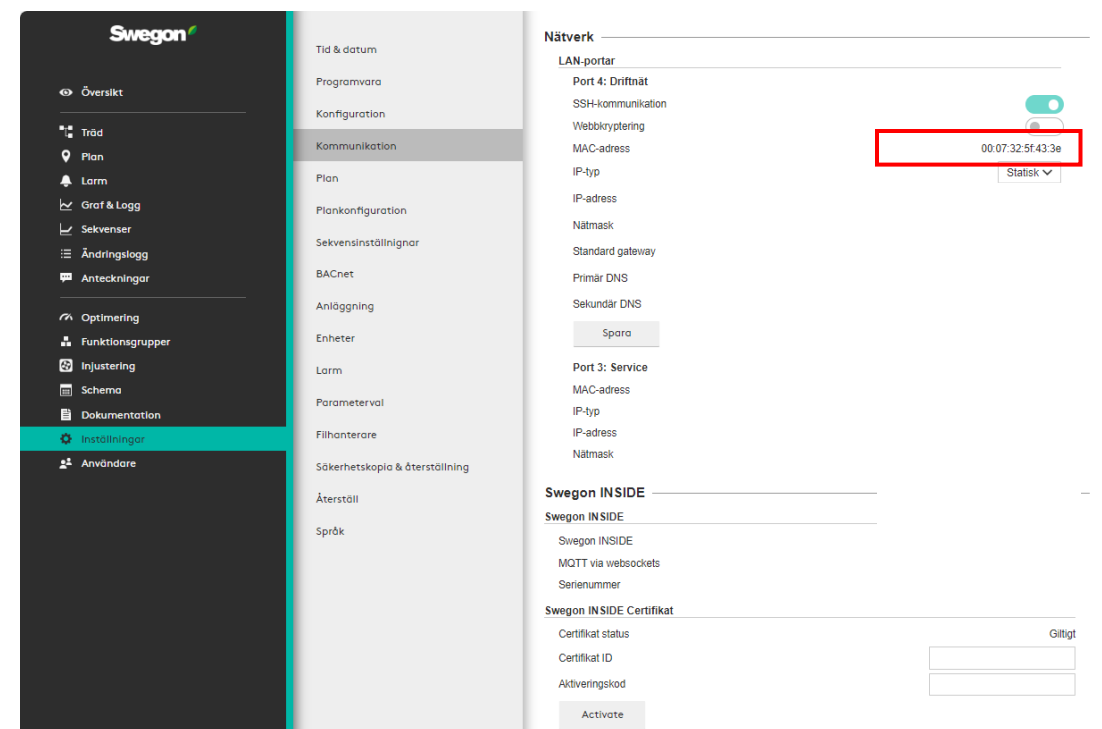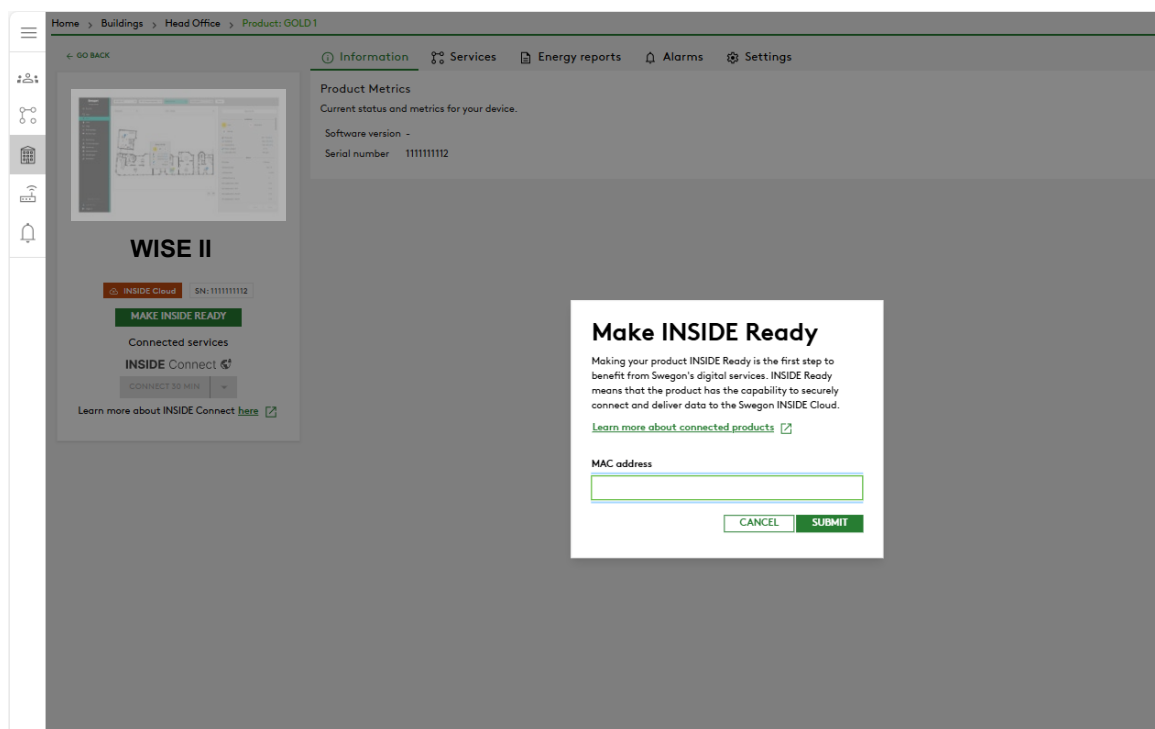

4. Kopier ID-en og aktiveringskoden, lim den inn i riktig tekstfelt i produktets HMI og trykk på “Aktiver”. Sørg for at “Swegon INSIDE”-knappen også er slått på. Se neste side.

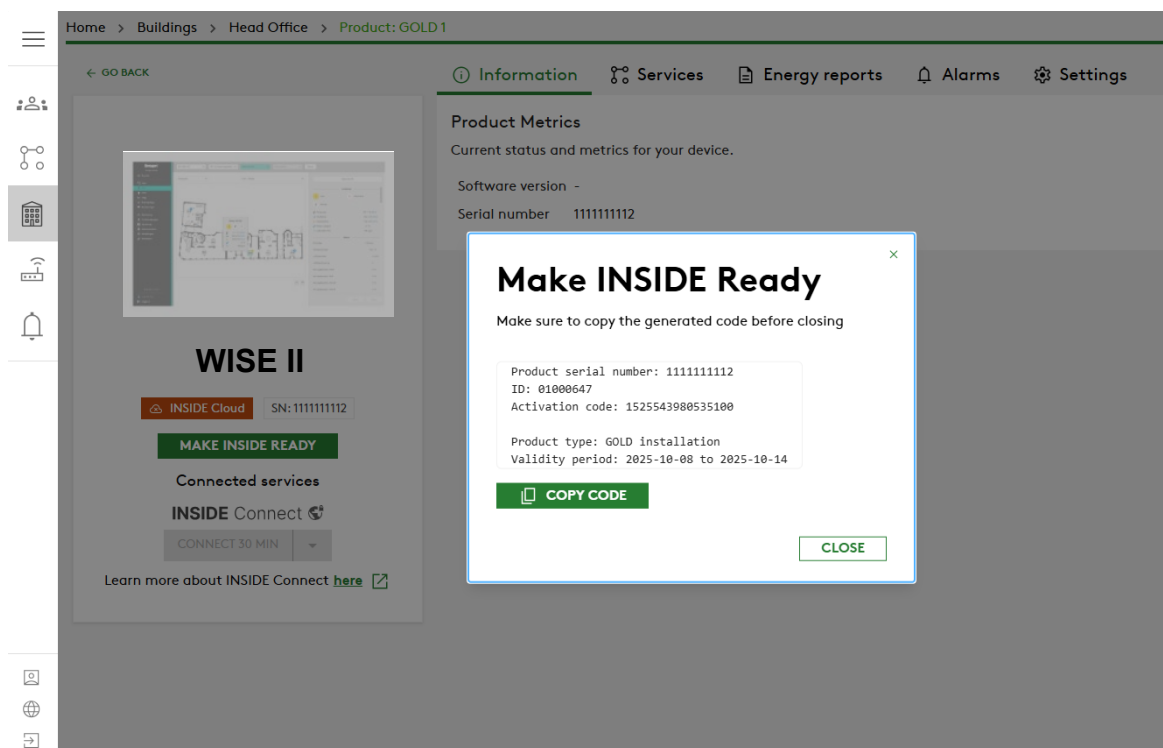


5. Logg inn på SuperWISE og gå til "Kommunikasjon"

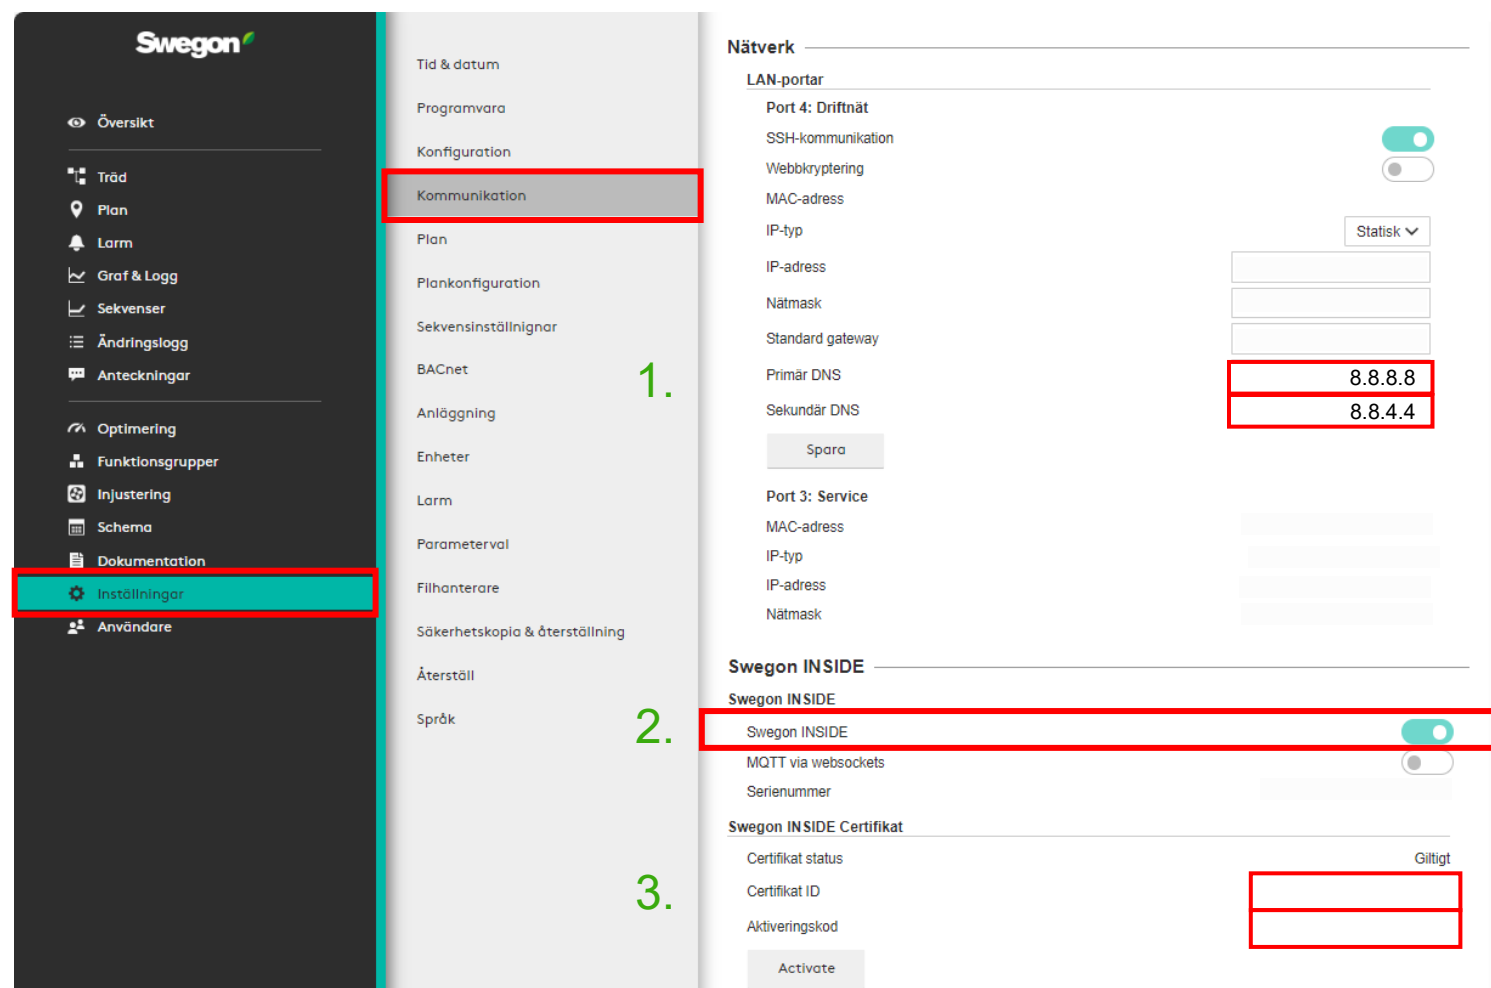

The screenshot shows the Swegon SuperWISE web interface. The left sidebar contains navigation options like 'Översikt', 'Träd', 'Plan', 'Larm', 'Graf & Logg', 'Sekvenser', 'Ändringslogg', 'Anteckningar', 'Optimering', 'Funktionsgrupper', 'Injustering', 'Schema', 'Dokumentation', and 'Användare'. The middle pane lists various settings categories, with 'Kommunikasjon' highlighted by a red box and the number 1. The right pane shows the 'Nätverk' (Network) settings, including 'LAN-portar' (LAN ports) and 'Swegon INSIDE' settings. The 'Swegon INSIDE' toggle switch is highlighted by a red box and the number 4. Other fields include 'Primär DNS' (8.8.8.8), 'Sekundär DNS' (8.8.4.4), and 'Swegon INSIDE Certifikat' (Certificate ID and Activation code).

1. Sørg for at DNS er fylt ut. (8.8.8.8 / 8.8.4.4)
2. Aktiver Swegon INSIDE.
3. Fyll inn sertifikat-ID og aktiveringskode. Klikk på "Aktiver"
4. Start SuperWISE på nytt

6. Når produktene er koblet til og deler data med INSIDE Cloud, vises det grønne skysymbolet.

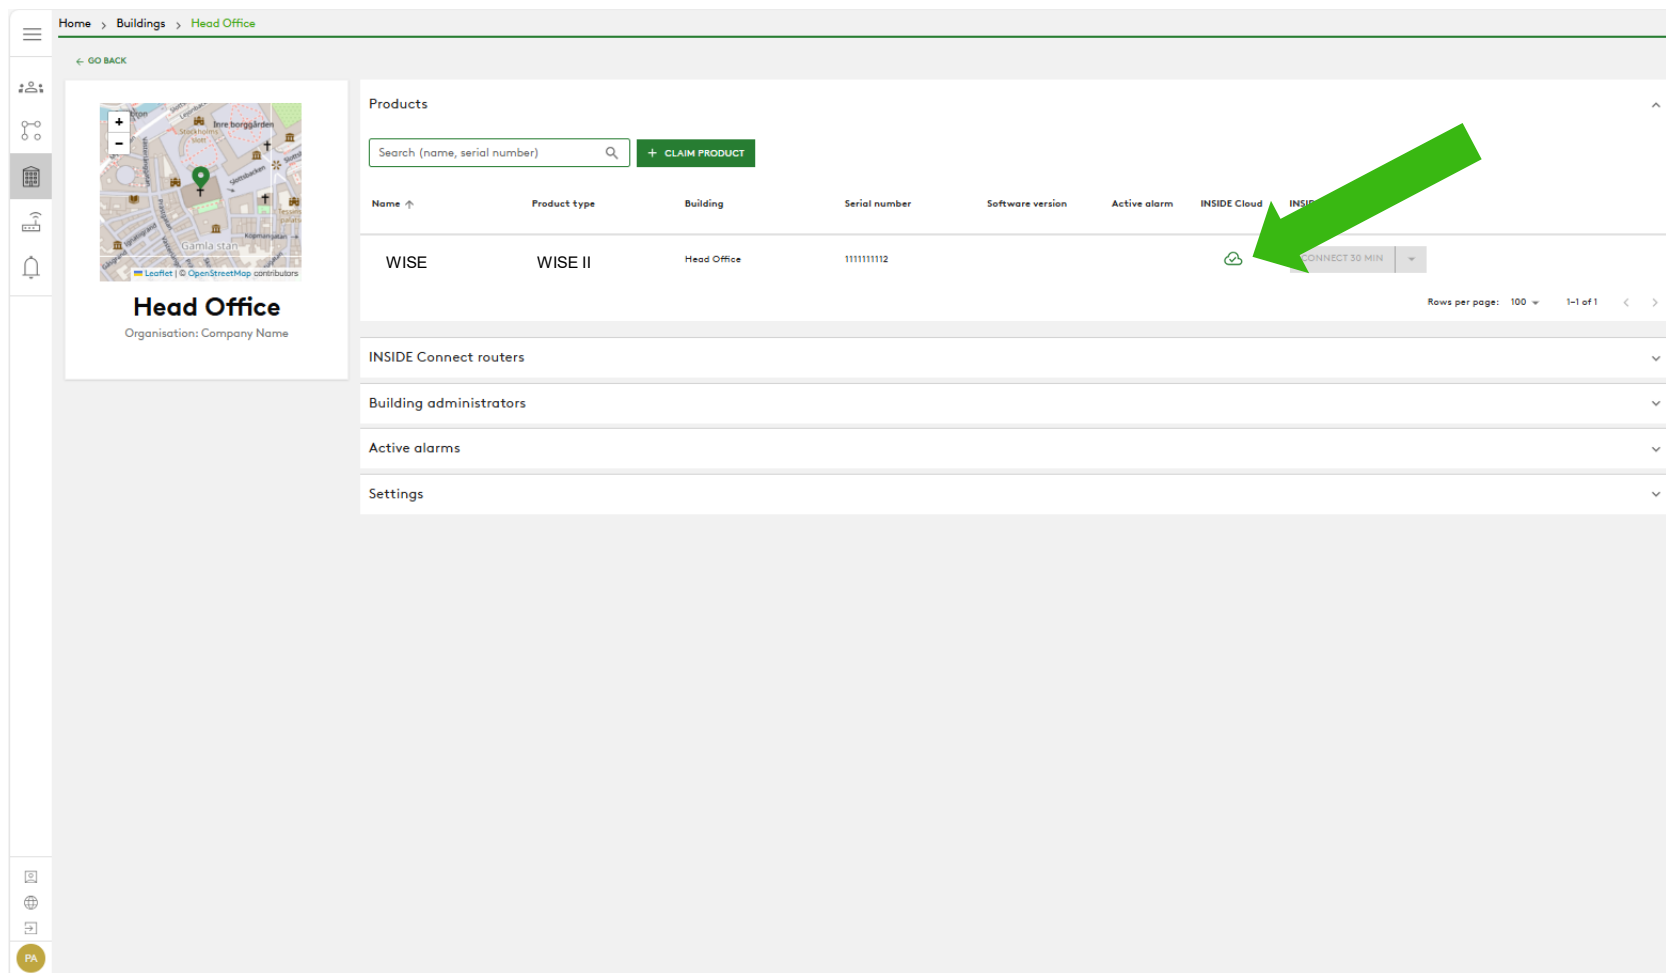

The screenshot shows the Swegon web interface. On the left, there is a sidebar with a map of 'Head Office' and a list of products. The main area displays a table of products. A green arrow points to a green cloud icon in the 'INSIDE Cloud' column, indicating that the product is connected to the cloud.

Products Table:

Name	Product type	Building	Serial number	Software version	Active alarm	INSIDE Cloud	INSIDE Connect
WISE	WISE II	Head Office	111111112				CONNECT 30 MIN

Head Office
Organisation: Company Name

INSIDE Connect routers

Building administrators

Active alarms

Settings

INSIDE Connect – Eksempel på IP-innstillinger

- IP-innstillingene for ruterene konfigureres i INSIDE Portal
- IP-innstillinger på WISE (laget i SuperWISE-nettgrensesnittet)

Ruter koblet til port 3 på SuperWISE

Ruterinnstilling:

IP: 169.254.235.6

Undernetmaske: 255.255.255.248

SuperWISE-innstilling:

IP: 169.254.235.1 (standard)

Nettmaske: 255.255.255.248

Ruter koblet til port 4 på SuperWISE

Ruterinnstillinger:

IP: 10.200.1.250

Nettmaske: 255.255.255.0

SuperWISE-innstilling:

IP: 10.200.1.100

Nettmaske: 255.255.255.0





INSIDE Portal

INSIDE Portal er plattformen for alle tilkoblede Swegon-produkter og knutepunktet for Swegons digitale tjenester

INSIDE Portal

Utgangspunktet for tilkoblede Swegon-produkter

- Kostnadsfritt
- Oversikt over nøkkelparametere
 - Systemoversikt
 - Maksimum- og minimumstemperatur
 - Status for behov for oppvarming/kjøling
 - Beleggsprosent
 - Aktive alarmer
- Inviter brukere til WISE Room Control

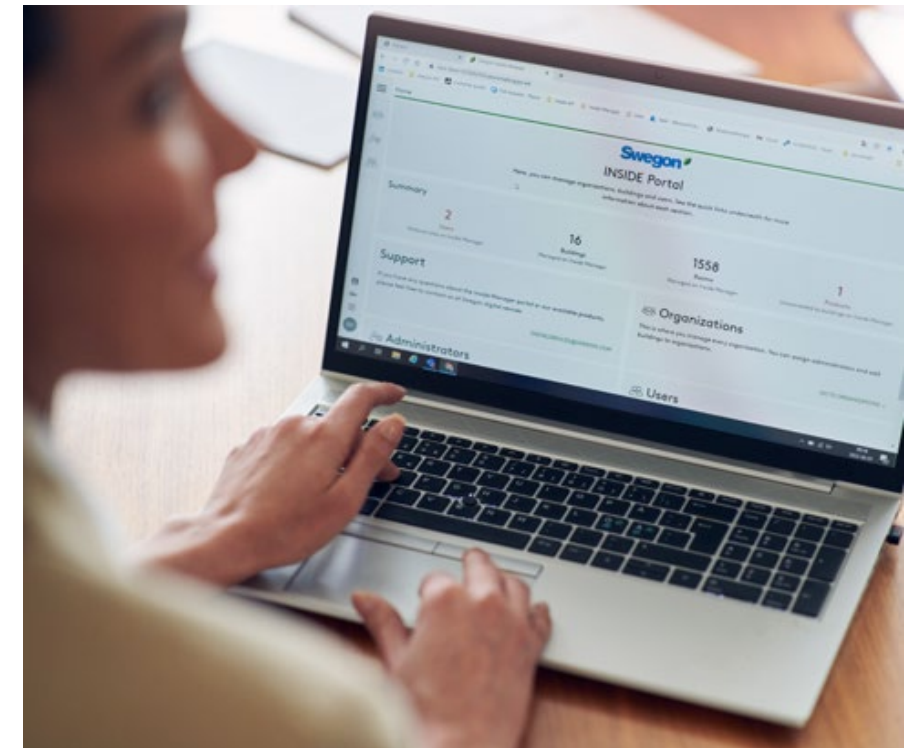

INSIDE Portal - Alarmvarsler via e-post

Få alarmvarsler til e-posten din fra tilkoblede enheter

Home > Alarm subscriptions

My alarm subscriptions

DELETE SELECTED

EDIT SELECTED


ADD ALARM SUBSCRIPTION

☐	Product name	Notify at (severity)	Building name	City	Country	Product type	Organisation
☐	Kv Målet 1, Umeå	A B	Swegon Umeå	Umeå	Sweden	SuperWISE	Swegon
☐	Åbyhøj GOLD	A B	Swegon Åbyhøj	Åbyhøj	Denmark	GOLD	Swegon Denmark
☐	Zeta Sky Hi R7 (R32)	A	Swegon Cantarana	Cantarana	Italy	BlueBox Chiller/Heatpump	Swegon
☐	Titon Sky Hi R0 HP	A	Swegon Cantarana	Cantarana	Italy	BlueBox Chiller/Heatpump	Swegon
☐	GEYSER Sky R0 (R290)	A	Swegon Cantarana	Cantarana	Italy	BlueBox Chiller/Heatpump	Swegon
☐	Epsilon Sky Hi	A	Swegon Cantarana	Cantarana	Italy	BlueBox Epsilon SKY	Swegon
☐	Boställsvägen 1 Örebro	A B I	Swegon Örebro	Örebro	Sweden	SuperWISE	Swegon
☐	SWEGON BUREAU	A B I	Swegon France Lyon	Lyon	France	SuperWISE	Swegon
☐	Zeta Rev	A	Swegon Cantarana	Cantarana	Italy	BlueBox Chiller/Heatpump	Swegon
☐	TA/FA 73	A B I	Swegon Kvånum	Kvånum	Sweden	GOLD	Swegon
☐	OPEN SPACE	A	Swegon Cantarana	Cantarana	Italy	GOLD	Swegon

PA

INSIDE Portal - Varsler via e-post

Velg hvilke varsler du ønsker å bli informert om via e-post

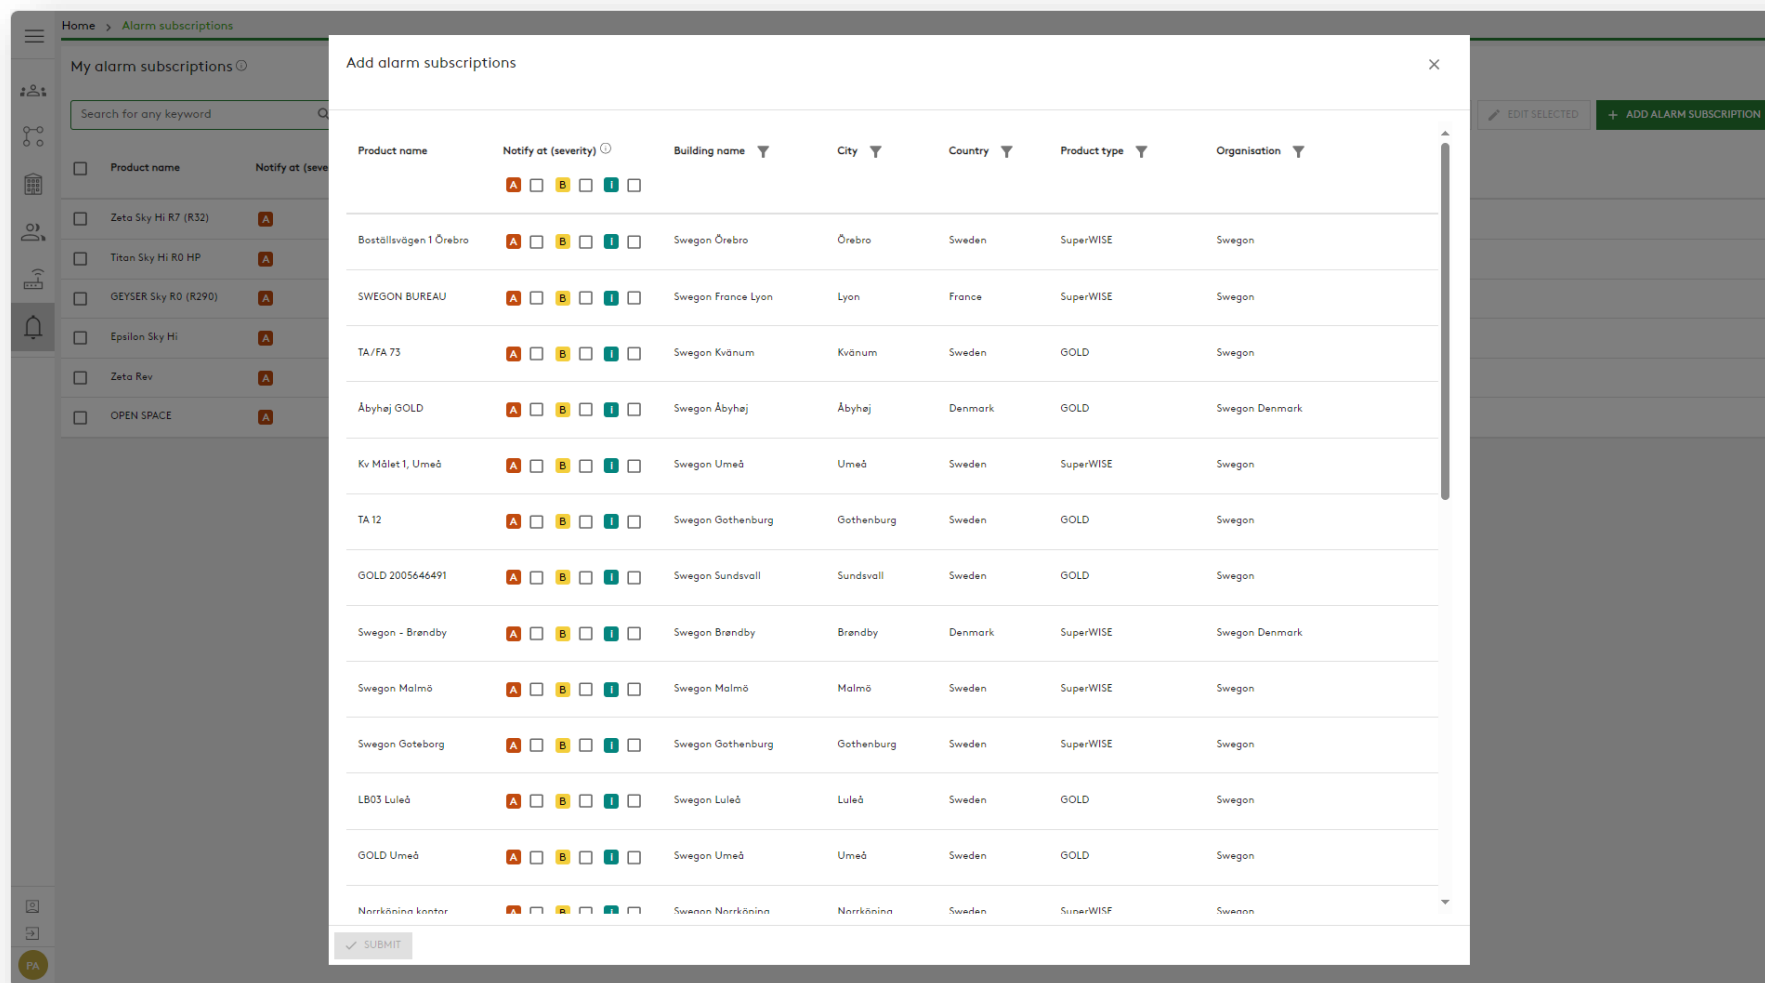

My alarm subscriptions

Search for any keyword

☐ Product name ☐ Notify at (severity)

☐ Zeta Sky Hi R7 (R32) ☐ A

☐ Titan Sky Hi R0 HP ☐ A

☐ OEYSER Sky R0 (R290) ☐ A

☐ Epsilon Sky Hi ☐ A

☐ Zeta Rev ☐ A

☐ OPEN SPACE ☐ A

Add alarm subscriptions

Product name	Notify at (severity)	Building name	City	Country	Product type	Organisation
	☐ A ☐ B ☐ C ☐ D					
Boställsvägen 1 Örebro	☐ A ☐ B ☐ C ☐ D	Swegon Örebro	Örebro	Sweden	SuperWISE	Swegon
SWEGON BUREAU	☐ A ☐ B ☐ C ☐ D	Swegon France Lyon	Lyon	France	SuperWISE	Swegon
TA/FA 73	☐ A ☐ B ☐ C ☐ D	Swegon Kvänum	Kvänum	Sweden	GOLD	Swegon
Åbyhøj GOLD	☐ A ☐ B ☐ C ☐ D	Swegon Åbyhøj	Åbyhøj	Denmark	GOLD	Swegon Denmark
Kv Målet 1, Umeå	☐ A ☐ B ☐ C ☐ D	Swegon Umeå	Umeå	Sweden	SuperWISE	Swegon
TA 12	☐ A ☐ B ☐ C ☐ D	Swegon Gothenburg	Gothenburg	Sweden	GOLD	Swegon
GOLD 2005646491	☐ A ☐ B ☐ C ☐ D	Swegon Sundsvall	Sundsvall	Sweden	GOLD	Swegon
Swegon - Brøndby	☐ A ☐ B ☐ C ☐ D	Swegon Brøndby	Brøndby	Denmark	SuperWISE	Swegon Denmark
Swegon Malmö	☐ A ☐ B ☐ C ☐ D	Swegon Malmö	Malmö	Sweden	SuperWISE	Swegon
Swegon Göteborg	☐ A ☐ B ☐ C ☐ D	Swegon Gothenburg	Gothenburg	Sweden	SuperWISE	Swegon
LB03 Luleå	☐ A ☐ B ☐ C ☐ D	Swegon Luleå	Luleå	Sweden	GOLD	Swegon
GOLD Umeå	☐ A ☐ B ☐ C ☐ D	Swegon Umeå	Umeå	Sweden	GOLD	Swegon
Norrköping kontor	☐ A ☐ B ☐ C ☐ D	Swegon Norrköping	Norrköping	Sweden	SuperWISE	Swegon

☐ SUBMIT

EDIT SELECTED + ADD ALARM SUBSCRIPTION

INSIDE Portal: Oversikt over tilkoblede enheter

Buildings				
Search for building name				
Name	City	Country	Number of products	Role
Swegon Åbyhøj	Åbyhøj	Denmark	1	Organisation Admin
Swegon Borås	Borås	Sweden	2	Organisation Admin
Swegon Brøndby	Brøndby	Denmark	2	Organisation Admin
Swegon Cantarana	Cantarana	Italy	6	Organisation Admin
Swegon France Lyon	Lyon	France	2	Organisation Admin
Swegon Gembloux	Gembloux	Belgium	1	Organisation Admin
Swegon Gothenburg	Gothenburg	Sweden	4	Organisation Admin
Swegon Kvänum	Kvänum	Sweden	4	Organisation Admin
Swegon Kvänum Testcenter	Kvänum	Sweden	2	Organisation Admin
Swegon Luleå	Luleå	Sweden	2	Organisation Admin
Swegon Malmö	Malmö	Sweden	1	Organisation Admin
Swegon Norrköping	Norrköping	Sweden	1	Organisation Admin
Swegon Örebro	Örebro	Sweden	1	Organisation Admin
Swegon Stockholm	Stockholm	Sweden	1	Organisation Admin
Swegon Sundsvall	Sundsvall	Sweden	1	Organisation Admin
Swegon Tomelilla	Tomelilla	Sweden	1	Organisation Admin
Swegon Umeå	Umeå	Sweden	2	Organisation Admin

Rows per page: 100 1-17 of 17

INSIDE Portal: Oversikt over tilkoblede enheter



Home > Buildings > Swegon Cantarana

← GO BACK

Swegon Cantarana
Cantarana, Italy
Latitude: 45.1993380911563
Longitude: 12.094361755745242

Products

Search (name, serial number)

Name ↑	Product type	Building	Serial number	Software version	Active alarm	Connected
Epsilon Sky Hi	BlueBox Epsilon SKY	Swegon Cantarana	SB1*****	61.1.3		
GEYSER Sky R0 (R290)	BlueBox Chiller/Heatpump	Swegon Cantarana	SB1*****	701.138.129.4		
OPEN SPACE	GOLD	Swegon Cantarana	20057*****	2.43		
Titan Sky Hi R0 HP	BlueBox Chiller/Heatpump	Swegon Cantarana	SB1*****	701.140.130.9		
Zeta Rev	BlueBox Chiller/Heatpump	Swegon Cantarana	SB1*****	701.140.130.9		
Zeta Sky Hi R7 (R32)	BlueBox Chiller/Heatpump	Swegon Cantarana	SB1*****			

Rows per page: 100 1-6 of 6

Building administrators

Active alarms

Full oversikt over Swegons produkter i hver bygning

- Beliggenhet
- Programvareversjon
- Aktive alarmer

+ CLAIM PRODUCT

INSIDE Portal

Logg inn på INSIDE Portal her: [Swegon INSIDE Portal](#)

Feel good **inside**



Welcome to Swegon INSIDE

You can login using your email and password if you already have an account or login with your existing Google or LinkedIn account. Sign up as a new user if you don't have an account.

Email

Password

☐ Remember Login

[Forgot your password?](#)

Log in

OR




Login as internal provider

Don't have an account?

[Sign up here](#)

Digitale tjenester

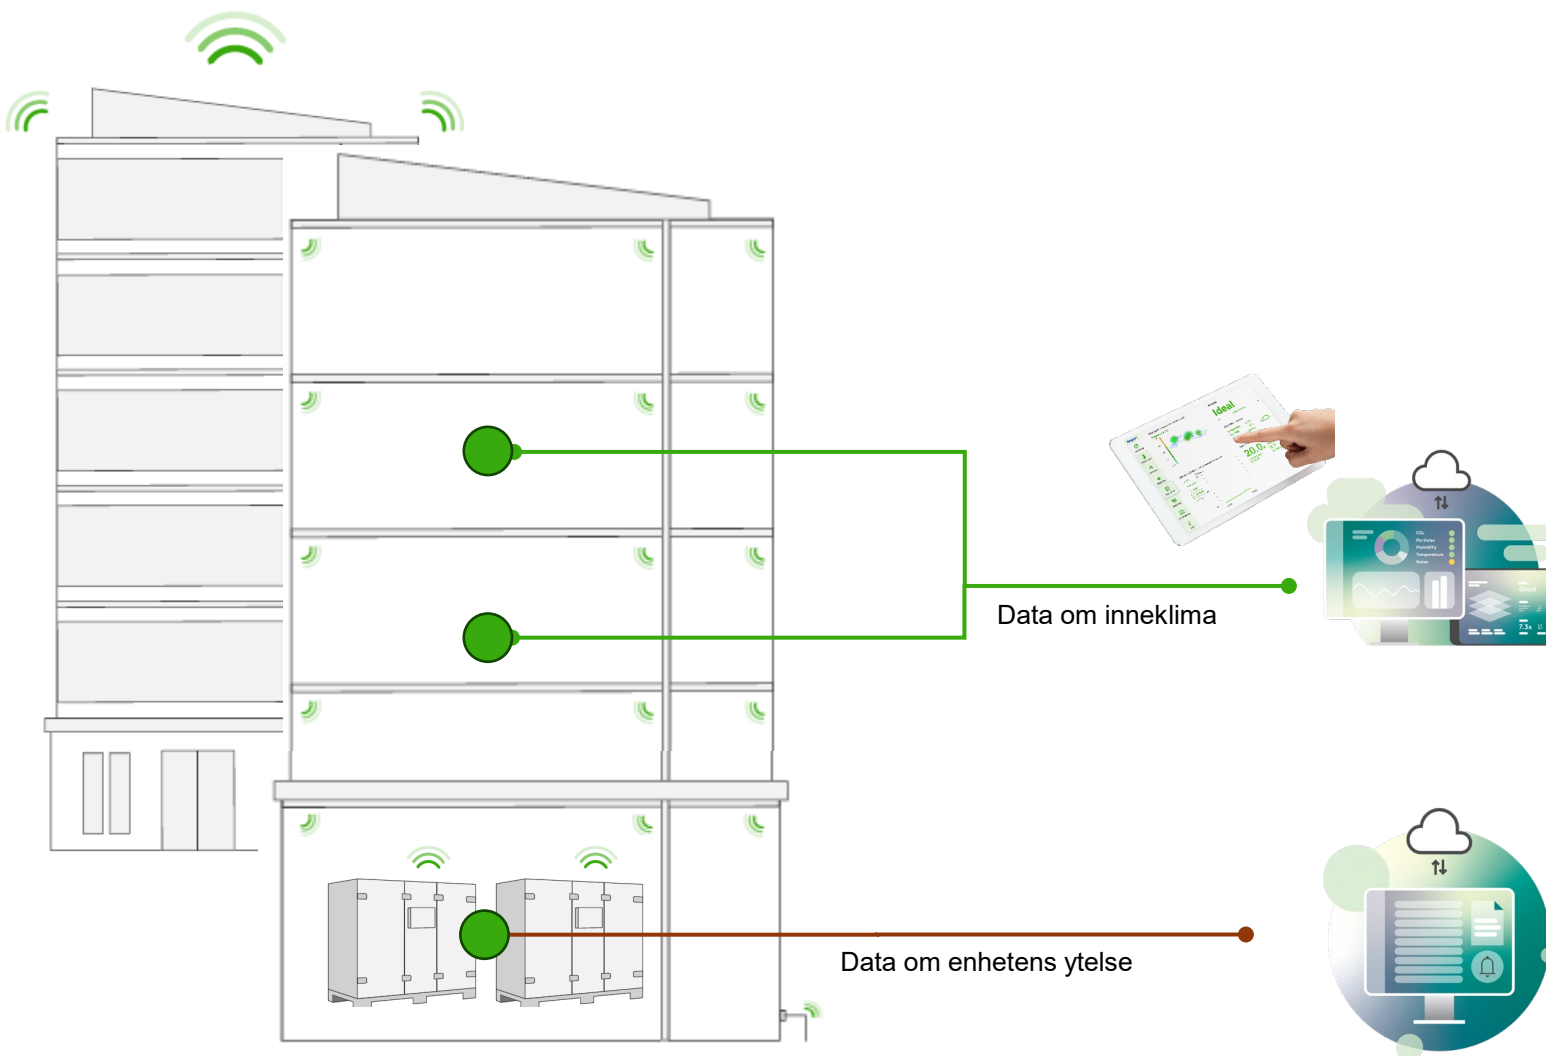

INSIDE Analytics & Visualiser
Analyse og visualisering av inneklimaet.

INSIDE Portal
Fjernovervåking av enhetens
nøkkelparametere, aktive alarmer og
energiforbruk.

Swegon 



Feel good **inside**

